

ResponseCard® XR


User Guide Standard Mode

Revised 4/30/08



TurningPoint


Section 1	Sending Responses In Presentation Mode
Section 2	Editing User Data
Section 3	Sending User Data
Section 4	Creating a Test / Homework Assessment
Section 5	Submitting a Saved Test / Homework Assessment
Section 6	Editing a Test / Homework Assessment
Section 7	Change Channel
Section 8	The Setup Menu
Section 9	Product Specifications

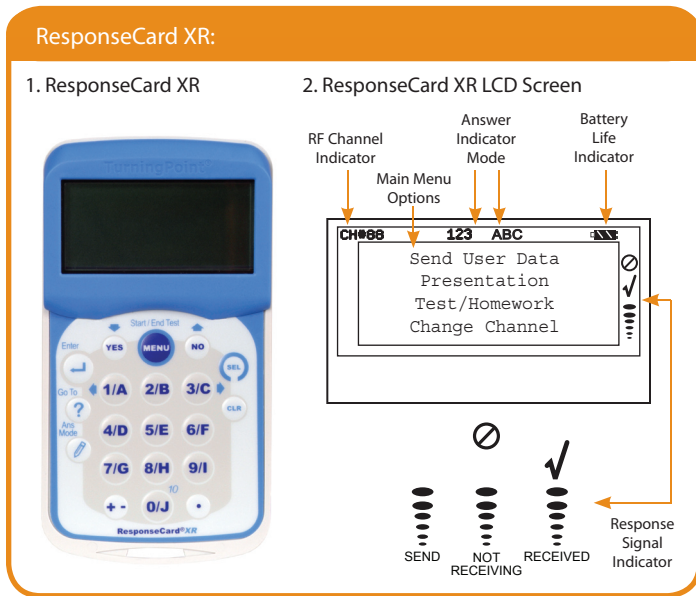


SECTION 1 – Sending Responses In Presentation Mode

**To be used during a live presentation when the speaker wants immediate feedback from the audience.*

1. Press **MENU**.
2. Highlight **Presentation** (Use the **YES** button for **Down** and the **NO** button for **Up**).
3. Press **ENTER**.
4. Your screen will display the following:

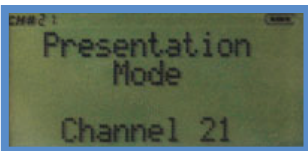

5. Press the button on the ResponseCard that corresponds to your answer choice.
6. Your answer can be verified on the screen after you make your selection.

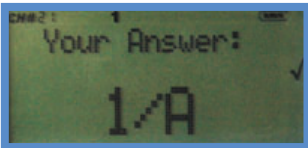


7. A check mark will appear on the right-hand side of your screen confirming your answer was received.
**If you receive a message stating: "Not accepting answers!" This means that polling was closed and you may not have answered the question. If you sent a successful answer before polling closed, then TurningPoint will accept the last successfully transmitted answer.*


SECTION 2 – Editing User Data

1. Press **MENU**.
2. Highlight **SETUP** (Use the **YES** button for **Down** and the **NO** button for **Up**).
3. Press **ENTER**.
4. Highlight **User Data** from the sub-menu.
5. Press **ENTER**.
6. Select **2** to Edit User Data.

7. Press **1** to edit your First Name.

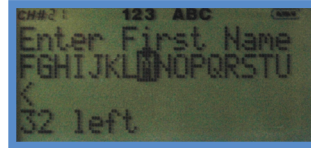

8. To choose a letter, use the **1/A** button to scroll **Left** and the **3/C** button to scroll **Right**. While the cursor is on the letter you'd like to choose, press the **SEL** button.
9. Your choice will appear on the next line in front of the > and the number of letters left will decrease by 1 each time.
10. Press **ENTER** when you are finished.

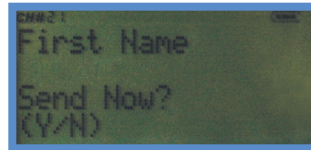

11. Press the **NO** button on your ResponseCard.
12. Select **2** to edit your Last Name.
13. Repeat steps 8 through 9.
14. Select **3** to edit your User ID.
15. Repeat steps 8 through 9.


SECTION 3 – Sending User Data

1. Press **MENU**.
2. Highlight **SEND USER DATA**.
3. Press **ENTER**.
4. The next screen will display which channel the ResponseCard is programmed to. If this is the correct channel press **ENTER**. If you need to enter a different channel number, use the numeric keys to enter your channel.
5. Press **ENTER** when the correct channel number is entered.
6. Your screen will display:
Channel Changed
Receiver Found
7. After the ResponseCard finds your channel the screen will display:
User Data
Send Successful

SECTION 4 – Creating a Test / Homework Assessment

1. Press **MENU**.
2. Highlight **Test / Homework** (Use the **YES** button for **Down** and the **NO** button for **Up**).
3. Press **ENTER**.
4. Press **1** for New Session.
5. Use the number keys to enter a value and Press **ENTER** once you've entered the test version number.
6. The ResponseCard will prompt you to verify you've entered the correct information.
7. Select **YES**.
8. You are now on the Test / Homework screen.
9. Enter the corresponding answers to the Test / Homework questions. You will receive confirmation that the answer has been stored.
10. Repeat step 10 until all of the questions are answered. The maximum number of answers that can be stored is 100.
11. Press **MENU** when you have completed the assessment.
12. You will be prompted to leave Test Mode. Choose **YES** or **NO**.

- The following options will be displayed on screen.

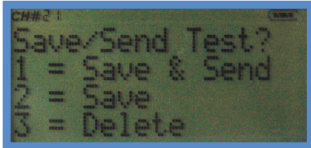


- Select **1** to save and submit the assessment immediately.
Select **2** to save the assessment and transmit at a later time.
Select **3** to delete the test.

SECTION 5 – Submitting a Saved Test / Homework Assessment

- Press **MENU**.
- Highlight **Test / Homework** (Use the **YES** button for **Down** and the **NO** button for **Up**).
- Press **ENTER**.
- Press **2** for “Manage Session”.
- Use the **YES** button to scroll down and select your test.
- Press **ENTER** when the test you want to edit is highlighted.
- Press **1** to “Send Session”.
- You will receive confirmation that your test has been submitted.

SECTION 6 – Editing a Test / Homework Assessment


- Press **MENU**.
- Highlight **Test / Homework** (Use the **YES** button for **Down** and the **NO** button for **Up**).
- Press **ENTER**.
- Press **2** for “Manage Session”.
- Use the **YES** button to scroll down and select your test.
**You cannot edit a test if the control number starts with “1”.*
- Press **ENTER** when the test you want to edit is highlighted.
- Press **3** to “Edit Session”.
- You can now use the **YES** and **NO** buttons to scroll through your test. You could also use the “Go To” button on the ResponseCard which looks like a pencil.
 - Press the “Go To” button.
 - Enter the 3-digit question number, example 004.
- To change the answer of the question you selected, press the button on the ResponseCard that corresponds to your new answer choice.
- Once all of your changes are made, press **MENU**.
- You will be prompted to leave Test Mode. Choose **YES** or **NO**.
- The following options will be displayed on screen.

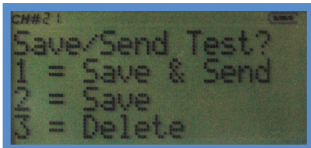

- Select **1** to submit the assessment immediately.
Select **2** to save the assessment and transmit at a later time.
Select **3** to delete the test.

SECTION 7– Change Channel

- Press **MENU**.
- Highlight **Change Channel** (Use the **YES** button for **Down** and the **NO** button for **Up**).
- Press **ENTER**.
- The next screen will show you which channel the ResponseCard is programmed to. Use the numeric keys to enter your channel.
- Press **ENTER** when the correct channel number is entered.
- Your screen will display:

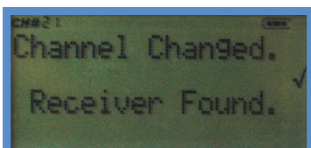

- You will then automatically enter into Presentation Mode.

SECTION 8 – The Setup Menu

Under the Setup Menu you have four options:

- User Data
- Contrast
- Unit ID
- Version

User Data - From this sub - menu you can View, Edit and Send User Information.

Contrast - From this sub - menu you can adjust the Contrast using the **YES** button for a lighter screen and the **NO** button to make your screen darker.

Unit ID - From this sub-menu you can view the Device ID of the ResponseCard.

Version - From this sub - menu you can see which version of the ResponseCard XR Firmware you currently have loaded.

SECTION 9 – Product Specifications

Enclosure

- Lightweight, compact, card format
- Dimensions: 4.0”L x 2.5”W x 0.75”H
- Weight: 2.0 oz. (with batteries)
- Angled LCD screen for optimum viewing.
- Durable, rugged case ensures maximum longevity under extreme conditions.

User Input

- 20 Key (1(A) - 10 (J), Answer Mode, Go To, Enter, Yes, No, Menu, Select, Clear, +/-, .(decimal)

Display

- Easy to read LCD Display.
- Dimensions: 50 mm x 20 mm viewable area.
- Display Features: Channel number, Battery life indicator, Answer choice, Response confirmation.

Power & Power Management

- Powered by two AAA batteries.
- Average battery life is 6 to 12 months.

This device is designed to be used with a standard USB cable no longer than 3 meters in length.

Do not connect USB to any source other than a power limited source per Table 2B of EN 60950-1:2002.

Interconnections between the unit and any computer must be with cable of PVC, TFE, PTFE, FEP, neoprene or polyimide insulation only.

Contact Us:

Customer Service Hours of Operation:
Mon. - Fri. (7am-9pm) Eastern Time

Customer Service Line:
1-866-746-3015

Customer Service Email:
support@turningtechnologies.com