

PresenterWare

User Guide



Version 1.0

© 2010 Turning Technologies, LLC. Portions Apple Inc.

No part of this document may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, without the express written permission of Turning Technologies, LLC. All rights reserved.

Turning Technologies, LLC, 255 West Federal Street, Youngstown, OH 44503 USA.

TurningPoint® AnyWhere is a registered trademark of Turning Technologies, LLC.

iPod®, iPod Touch®, iPhone®, and Bonjour® are registered trademarks of Apple, Inc. iPad™ is a trademark of Apple, Inc.

Windows® is a registered trademark of Microsoft Corporation.

Other trademarked product names mentioned in this manual are owned by their respective companies.

1 About PresenterWare	1
System Requirements	1
How to Install PresenterWare on your device	1
2 PresenterWare for TurningPoint AnyWhere	2
How to configure PresenterWare for TurningPoint AnyWhere PC	2
How to Configure PresenterWare for TurningPoint AnyWhere Mac	3
How to Connect the PresenterWare Device	3
How to Manually Configure Hosts	4
Main Screen	5
3 PresenterWare for TuningPoint	7
How to Configure PresenterWare for TurningPoint	7
How to Connect the PresenterWare Device	8
How to Manually Configure Hosts	9
Main Screen	10
Contact Us	12

1

About PresenterWare

System Requirements

- iPhone, iPod Touch, iPad OS 3.0 or higher.
- Wi-Fi
- TurningPoint for PC 4.2.4 or higher
- TurningPoint AnyWhere for PC 2.4.0 or higher
- TurningPoint AnyWhere for Mac 2.4.0 or higher
- Bonjour (Optional)

How to Install PresenterWare on your device

- 1 You can download PresenterWare either from iTunes, or the App Store on your iPhone, iPod Touch, or iPad.

2 PresenterWare for TurningPoint AnyWhere

How to configure PresenterWare for TurningPoint AnyWhere PC

- 1 Click the **Main Menu** button (down arrow) mouse over **Tools** and select **Settings**.
- 2 Select **Response Devices** from the navigation pane on the left.
- 3 Scroll down to **PresenterWare**.
- 4 To the right of **Enable PresenterWare**, select **True**.
- 5 To the right of **PresenterWare Port**, enter the network port number.
- 6 Optional: To the right of **Bonjour Name**, enter the **Presenting Computer's Bonjour Name**.

Note Bonjour must be installed on the Presenting PC to make use of the Bonjour name in step 6. Bonjour for Windows can be downloaded for free from Apple at <http://apple.com/support/downloads/bonjourforwindows.html>

How to Configure PresenterWare for TurningPoint AnyWhere Mac

- 1 Click **TurningPoint AnyWhere** and select **Preferences....**
- 2 Select **Response Devices** from the navigation pane on the left.
- 3 Scroll down to **PresenterWare** .
- 4 To the right of **Enable PresenterWare**, select **True**.
- 5 To the right of **PresenterWare Port**, enter the network port number.
- 6 To the right of **Name**, enter the **Presenting Computer's Bonjour Name**.
 - By default, this will be set to the Mac's Computer Name.

How to Connect the PresenterWare Device


- 1 Open **PresenterWare** and select a **Host**.



- Manually entered Hosts are displayed under **Manual Hosts**. To setup a Host manually, see *How to Manually Configure Hosts* on page 4.
- Hosts running Bonjour will be displayed under **Discovered Hosts**.

- If connecting to a host for the first time, a challenge code will be displayed on the Presenter device. Follow the onscreen instructions to configure the application on the presenting computer to complete the connection.

Example Screen for TurningPoint AnyWhere PC

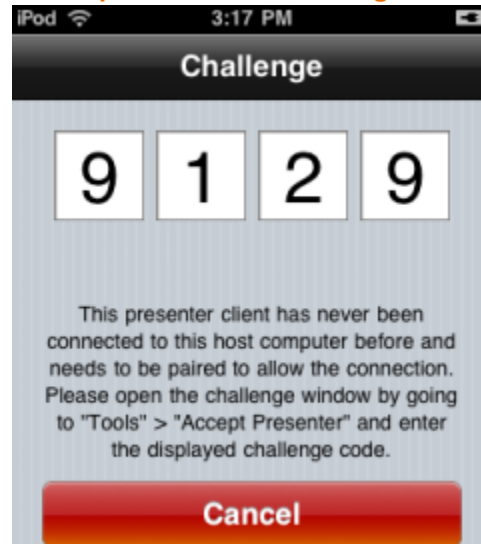


How to Manually Configure Hosts

PresenterWare allows the user to enter a Host computer's IP address and Port Number to setup manual connections to a presenting Computer. This feature is useful on PCs not utilizing Bonjour.

- 1 From the Hosts screen, touch the (+) button in the upper left of PresenterWare
- 2 Enter the **Host IP Address** in the **Address** text box.
- 3 Enter the **Host Port Number** in the **Port** text box.
- 4 Touch **Save** in the upper right of the screen.

Main Screen



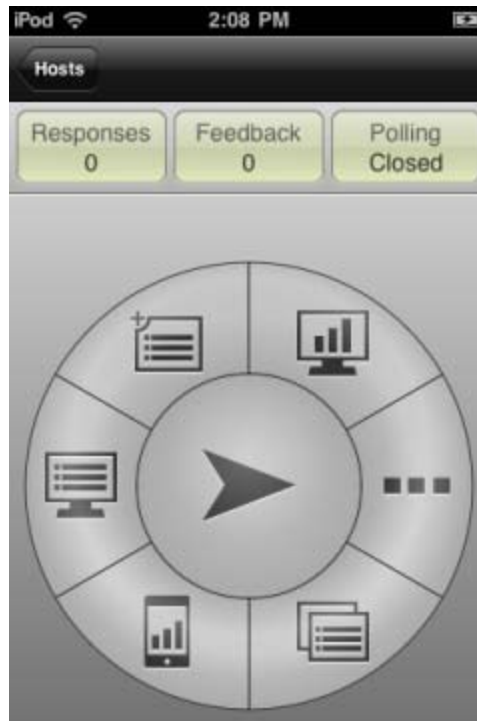




- 1 After connecting to a Host, the main navigation screen is displayed:



Information Section

Section	Features
Responses	Displays the number of responses received for the current question.
Feedback	Displays the number of comments submitted.
Polling Open/Closed	Displays the current polling status

Control Section

Section	Features
Insert Question 	Custom Question, Fill in the Blank, and 2-10 Answer choices.
Chart Window 	Open and Close the chart window on the presentation computer.
More 	Make Poll Anonymous, Toggle Response Grid, Toggle Non Response Grid, Toggle Presentation Full Screen, Toggle Countdown Timer
Select Question 	Allows you to select a question for polling from the loaded Question List.
Live Chart 	Displays a live chart on the presenter device and shows results in real time.
Presentation Window 	Opens and closes the Presentation Window
Start/Stop 	Starts and Stops polling for questions.

3 PresenterWare for TurningPoint

How to Configure PresenterWare for TurningPoint

- 1 From the TurningPoint toolbar, Click **Tools** and select **Settings**.
- 2 Select **Response Devices** from the navigation pane on the left.
- 3 Locate **PresenterWare**.
- 4 To the right of **Enable PresenterWare**, select **True**.
- 5 To the right of **PresenterWare Port**, enter the network **port number**.
- 6 Optional: To the right of **Bonjour Name**, enter the **Presenting Computer's Bonjour Name**.

Note Bonjour must be installed on the Presenting PC to make use of the Bonjour name in step 6. Bonjour for Windows can be downloaded for free from Apple at <http://apple.com/support/downloads/bonjourforwindows.html>


How to Connect the PresenterWare Device

- 1 Open **PresenterWare** and select a **Host**.



- Manually entered Hosts are displayed under **Manual Hosts**. To setup a Host manually, see **How to Manually Configure Hosts** on page 9.
- Hosts running Bonjour will be displayed under **Discovered Hosts**.
- If connecting to a host for the first time, a challenge code will be displayed on the Presenter device. Follow the onscreen instructions to configure the application on the presenting computer to complete the connection.

Example Screen for TurningPoint AnyWhere PC

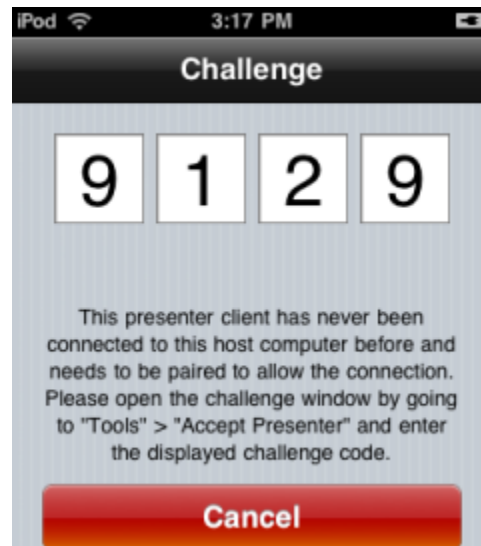

How to Manually Configure Hosts

PresenterWare allows the user to enter a Host computer's IP address and Port Number to setup manual connections to a presenting Computer. This feature is useful on PCs not utilizing Bonjour.

- 1 From the Hosts screen, touch the (+) button in the upper left of PresenterWare
- 2 Enter the **Host IP Address** in the **Address** text box.
- 3 Enter the **Host Port Number** in the **Port** text box.
- 4 Touch **Save** in the upper right of the screen.

Main Screen








- 1 After connecting to a Host, the main navigation screen is displayed:



Information Section

Section	Features
Responses	Displays the number of responses received for the current question.
Feedback	Displays the number of comments submitted.
Polling Open/Closed	Displays the current polling status

Control Section

Section	Features
Insert Slide 	Custom Question, 2-10 Answer choices, Fill in the Blank, Anonymous, Yes/No, True/False, Likert Scale 4 - 7, RF Channel Slide, Essay, Team Leader Boards, and Participant Leader Boards.
View Presenter Notes 	View the Presenter Notes for the current slide.
More 	Make Poll Anonymous, Repoll, Toggle Response Grid, Toggle Non Response Grid, and Toggle Presentation Full Screen.
Select Question 	Allows you to select a question for polling from the loaded Question List.
View Live Results 	Displays a live chart on the presenter device and shows results in real time.
Back 	Goes back one step in slide or to previous slide in the slide deck.
Advance 	Advances to next step in slide or to the next slide in the slide deck.

Contact Us

Turning Technologies Customer Service Department offers first class technical support second to none.

Technical Support is available Monday - Friday, 7am-9pm EST.

For your convenience we offer several methods of communication for technical support. From within the contiguous United States, you can reach Customer Service toll-free by calling 1-877-726-4602.

If calling from outside the United States please call +1.330.746.3015.

Customer Service may also be reached via email at support@turningtechnologies.com. Please note, it may take up to 2 business days for a reply if contacted via email.